

TLE24003B



SOFT FLOW



WATER SAVING



HYDRO ELECTRIC POWER

※only with TLE03501B

FEATURES

- Beautiful appearance, generous.
- Beautiful shape, noble quality
- It is easy to install and use
- The unique bubble spitting technology makes the water flow smooth and strong.
- 1.3L water can save water and bring more comfortable experience

SPECIFICES

- Water Inlet Requirement : 0.05MPa(Dynamic Pressure) ~0.75MPa(Static Pressure)
- Water Efficiency : Grade 1
- Drainage accessory : not included
- Operating temperature : 1~55°C
- Detection range: ≤250mm

OTHERS


- Recommend fittings :
- Functional Part:
- TLE01501B(AC)
- TLE04501B(DC)
- TLE03501B(HYDRO ELECTRIC POWER)
- Thermostatic : TLE05701B

TLE24003B+TLE01501B/TLE03501B/TLE04501B Aqua-auto faucet(single)



TOTO(CHINA) CO.,LTD. All rights reserved.

TLE24003B+TLE01501B/TLE03501B/TLE04501B
+TLE05701B Aqua-auto faucet(thermal)

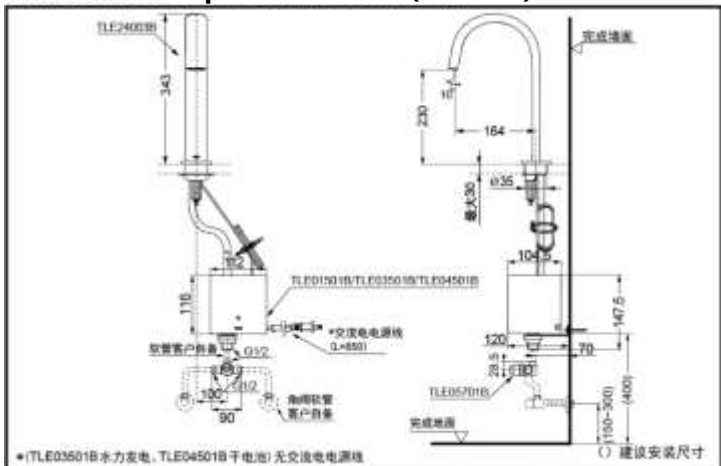

TOTO(CHINA) CO.,LTD. All rights reserved.

TOTO(CHINA) CO.,LTD. www.toto.com.cn